



General Purpose Castors

Steel Framed Castors with Nylon Wheels

Fixed castors and swivel castors with steel frames.

Maximum load capacity tested according to BS EN 12532:1999 requirements.



Fixing System	Top plate
Frame	Cold pressed steel plate
Wheel Tread	Nylon 6
Wheel Bearing Type	Plain bore



Features



Technical Information

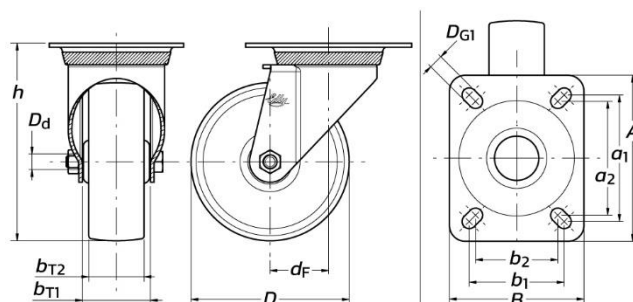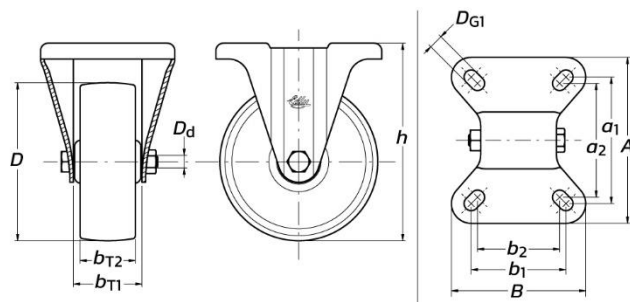

Order Code	Load Capacity (in kilograms)	Dimensions (in millimetres)											Physical Mass (in grams)
		$A \times B$	$a_1 \times b_1$	$a_2 \times b_2$	D_{G1}	D	h	d_F	b_{T1}	b_{T2}	D_d	Swept Radius	
NLK-80	100	105 × 85	80 × 60	72 × 52	9	80	105	-	43	32	10	-	395
NLJ-80	100	105 × 85	80 × 60	72 × 52	9	80	105	35	43	32	10	75,1	525
NLK-100	125	105 × 85	80 × 60	72 × 52	9	100	125	-	43	35	10	-	500
NLJ-100	125	105 × 85	80 × 60	72 × 52	9	100	125	37	43	35	10	87,2	600
NLK-125	150	105 × 85	80 × 60	72 × 52	9	125	150	-	43	38	10	-	630
NLJ-125	150	105 × 85	80 × 60	72 × 52	9	125	150	39	43	38	10	101,8	700

Technical information and dimensions provided above are subject to tolerances