



Industrial Grade Castors

Steel Framed Castors with Nylon Wheels

Fixed castors and swivel castors with steel frames.
Maximum load capacity tested according to BS EN 12532:1999 requirements.


Fixing System	Top plate
Frame	Cold pressed steel plate
Wheel Tread	Nylon 6
Wheel Bearing Type	Plain bore




Features



Technical Information

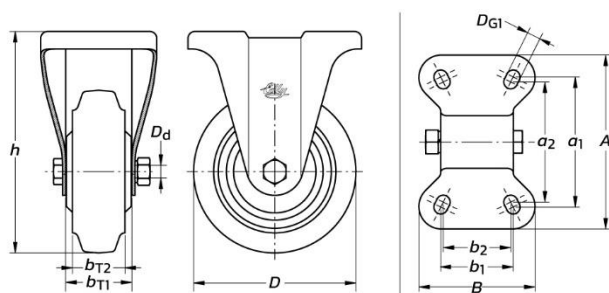

NK Fixed Castors

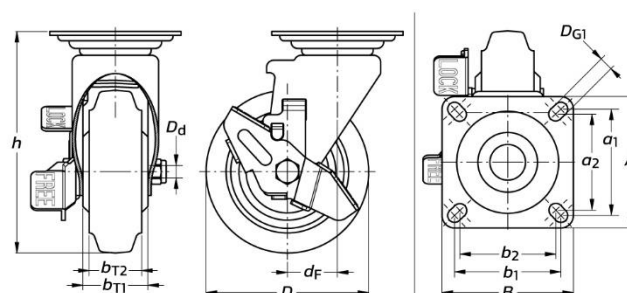

NJ Swivel Castors (applicable to castor frames with or without wheel brake)

Order Code	Load Capacity (kg)	Dimensions (in millimetres)											Physical Mass (in grams)
		A × B	a ₁ × b ₁	a ₂ × b ₂	D _{G1}	D	h	d _F	b _{T1}	b _{T2}	D _d	Swept Radius	
NK-75 ND	133	95 × 72	64,5 × 41,5	61,5 × 38,5	9,5	75	102	-	39	32	10	-	360
NJ-75 ND	133	82 × 82	64,5 × 64,5	61,5 × 61,5	9,5	75	102	30	39	32	10	68,5	480
NJ-75-S2 ND*	133	82 × 82	64,5 × 64,5	61,5 × 61,5	9,5	75	102	30	39	32	10	68,5	550
NK-100 ND	200	115 × 80	82 × 47	78 × 43	11	100	144	-	42	35	12	-	590
NJ-100 ND	200	95 × 95	73 × 73	68 × 68	11	100	144	35	42	35	12	85	890
NJ-100-S2 ND*	200	95 × 95	73 × 73	68 × 68	11	100	144	35	42	35	12	87,6	980
NK-130 ND	275	139 × 93	104 × 58	96 × 54	11	130	177	-	52	42	12	-	1.020
NJ-130 ND	275	105 × 105	83,5 × 83,5	76,5 × 76,5	11	130	177	40	52	42	12	105,4	1.305
NJ-130-S2 ND*	275	105 × 105	83,5 × 83,5	76,5 × 76,5	11	130	177	40	52	42	12	105,4	1.515
NK-150 ND	330	139 × 93	104 × 58	96 × 54	11	150	198	-	52	45	12	-	1.305
NJ-150 ND	330	120 × 120	93,5 × 93,5	86,5 × 86,5	11	150	198	45	52	45	12	120,3	1.740
NJ-150-S2 ND*	330	120 × 120	93,5 × 93,5	86,5 × 86,5	11	150	198	45	52	45	12	120,3	1.960
NK-200 ND	440	151 × 102	116 × 67	108 × 59	11,5	200	250	-	55	45	16	-	2.330
NJ-200 ND	440	140 × 140	115 × 115	105 × 105	11,5	200	250	58	55	45	16	158	3.005

Technical information and dimensions provided above are subject to tolerances

* Swivel castors equipped with wheel brake