



Industrial Grade Castors

Steel Framed Castors with Nylon Wheels and Precision Ball Bearings


Fixed castors and swivel castors with steel frames.

Maximum load capacity tested according to BS EN 12532:1999 requirements.


Fixing System	Top plate
Frame	Cold pressed steel plate
Wheel Tread	Nylon 6
Wheel Bearing Type	Double precision ball bearings




Features

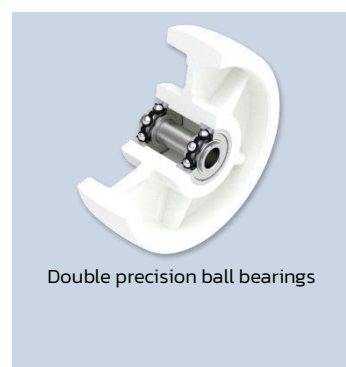

Technical Information

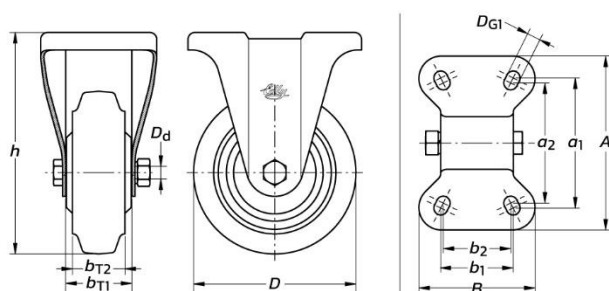

NBK Fixed Castors

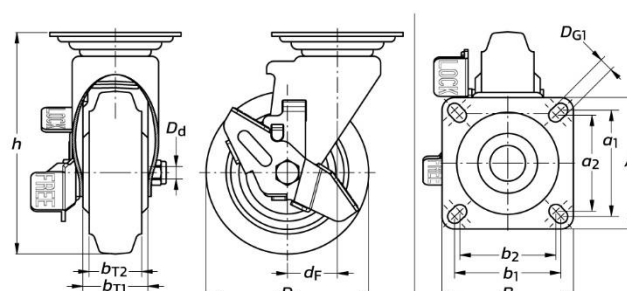

NBJ Swivel Castors (applicable to castor frames with or without wheel brake)

Order Code	Load Capacity (kg)	Dimensions (in millimetres)											Physical Mass (in grams)
		A × B	a ₁ × b ₁	a ₂ × b ₂	D _{G1}	D	h	d _F	b _{T1}	b _{T2}	D _d	Swept Radius	
NBK-75 ND	133	95 × 72	64,5 × 41,5	61,5 × 38,5	9,5	75	102	-	39	32	10	-	395
NBJ-75 ND	133	82 × 82	64,5 × 64,5	61,5 × 61,5	9,5	75	102	30	39	32	10	68,5	515
NBJ-75-S2 ND*	133	82 × 82	64,5 × 64,5	61,5 × 61,5	9,5	75	102	30	39	32	10	68,5	590
NBK-100 ND	200	115 × 80	82 × 47	78 × 43	11	100	144	-	42	35	12	-	625
NBJ-100 ND	200	95 × 95	73 × 73	68 × 68	11	100	144	35	42	35	12	85	925
NBJ-100-S2 ND*	200	95 × 95	73 × 73	68 × 68	11	100	144	35	42	35	12	87,6	1.015
NBK-130 ND	275	139 × 93	104 × 58	96 × 54	11	130	177	-	52	42	12	-	1.105
NBJ-130 ND	275	105 × 105	83,5 × 83,5	76,5 × 76,5	11	130	177	40	52	42	12	105,4	1.390
NBJ-130-S2 ND*	275	105 × 105	83,5 × 83,5	76,5 × 76,5	11	130	177	40	52	42	12	105,4	1.600
NBK-150 ND	330	139 × 93	104 × 58	96 × 54	11	150	198	-	52	45	12	-	1.390
NBJ-150 ND	330	120 × 120	93,5 × 93,5	86,5 × 86,5	11	150	198	45	52	45	12	120,3	1.825
NBJ-150-S2 ND*	330	120 × 120	93,5 × 93,5	86,5 × 86,5	11	150	198	45	52	45	12	120,3	2.040
NBK-200 ND	440	151 × 102	116 × 67	108 × 59	11,5	200	250	-	55	45	16	-	2.555
NBJ-200 ND	440	140 × 140	115 × 115	105 × 105	11,5	200	250	58	55	45	16	158	3.230

Technical information and dimensions provided above are subject to tolerances

* Swivel castors equipped with wheel brake