



Industrial Grade Castors

Steel Framed Castors with Polyurethane Wheels and Precision Ball Bearings

Fixed castors and swivel castors with steel frames.

Maximum load capacity tested according to BS EN 12532:1999 requirements.

Fixing System	Top plate
Frame	Cold pressed steel plate
Wheel Tread	Polyurethane
Wheel Bearing Type	Double precision ball bearings



Picture may differ from actual product

Features



Double precision ball bearings




Pressed steel frames




Foot actuated wheel brake
(castors with S2 ND suffix, with wheels 75, 100, 130 and 150 millimetres in diameter)

Technical Information

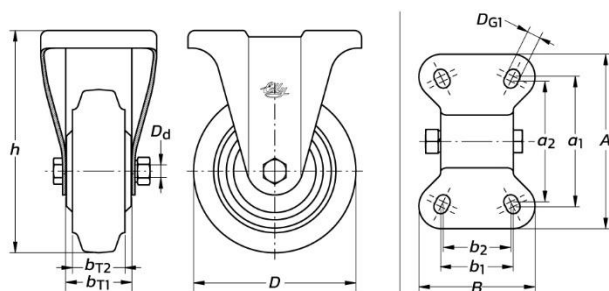

PK Fixed Castors

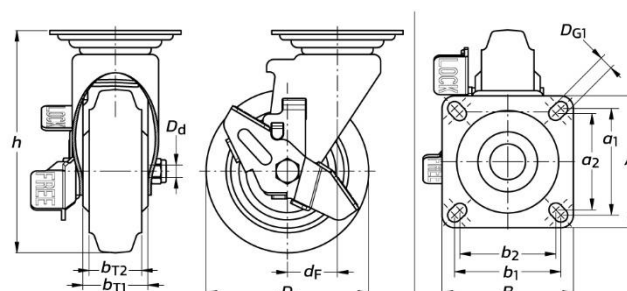

PJ Swivel Castors (applicable to castor frames with or without wheel brake)

Order Code	Load Capacity (kg)	Dimensions (in millimetres)											Physical Mass (in grams)
		A × B	a ₁ × b ₁	a ₂ × b ₂	D _{G1}	D	h	d _F	b _{T1}	b _{T2}	D _d	Swept Radius	
PK-75 ND	133	95 × 72	64,5 × 41,5	61,5 × 38,5	9,5	75	102	-	39	32	10	-	430
PJ-75 ND	133	82 × 82	64,5 × 64,5	61,5 × 61,5	9,5	75	102	30	39	32	10	67,9	550
PJ-75-S2 ND*	133	82 × 82	64,5 × 64,5	61,5 × 61,5	9,5	75	102	30	39	32	10	67,9	625
PK-100 ND	200	115 × 80	82 × 47	78 × 43	11	100	144	-	42	35	12	-	590
PJ-100 ND	200	95 × 95	73 × 73	68 × 68	11	100	144	35	42	35	12	85,2	990
PJ-100-S2 ND*	200	95 × 95	73 × 73	68 × 68	11	100	144	35	42	35	12	87,6	1.080
PK-130 ND	275	139 × 93	104 × 58	96 × 54	11	130	177	-	52	42	12	-	1.165
PJ-130 ND	275	105 × 105	83,5 × 83,5	76,5 × 76,5	11	130	177	40	52	42	12	105,2	1.455
PJ-130-S2 ND*	275	105 × 105	83,5 × 83,5	76,5 × 76,5	11	130	177	40	52	42	12	105,2	1.660
PK-150 ND	330	139 × 93	104 × 58	96 × 54	11	150	198	-	52	45	12	-	1.510
PJ-150 ND	330	120 × 120	93,5 × 93,5	86,5 × 86,5	11	150	198	45	52	45	12	120	1.950
PJ-150-S2 ND*	330	120 × 120	93,5 × 93,5	86,5 × 86,5	11	150	198	45	52	45	12	120	2.160
PK-200 ND	440	151 × 102	116 × 67	108 × 59	11,5	200	250	-	55	45	16	-	2.700
PJ-200 ND	440	140 × 140	115 × 115	105 × 105	11,5	200	250	58	55	45	16	158	3.385

Technical information and dimensions provided above are subject to tolerances

* Swivel castors equipped with wheel brake