



Shopping Cart Castors

Rubber Wheeled Shopping Cart Castors

Fixed and swivel castors with steel frames and rubber wheels with precision ball bearings.


Maximum load capacity tested according to BS EN 12532:1999 requirements.

Fixing System	Single bolt fixing
Frame	Cold pressed steel
Wheel Tread	Natural rubber
Wheel Bearing Type	Precision ball bearings



Picture may differ from actual product

Features



Natural rubber wheel with precision ball bearing




Pressed steel frames




Threadguards to prevent manifestation of threads and any other foreign objects in the wheel hub

Technical Information

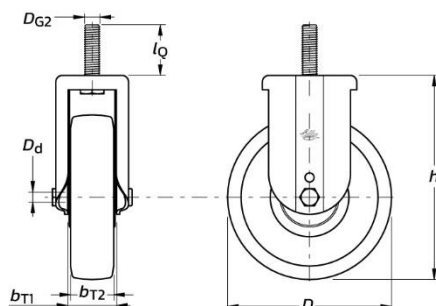

GRBRK Fixed Castors

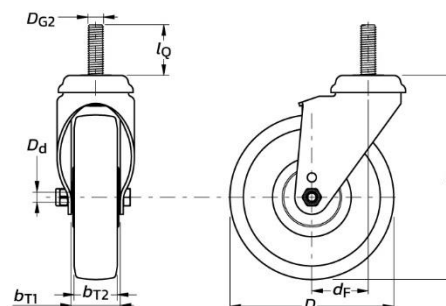

GRBRJ Swivel Castors

Order Code	Load Capacity (kg)	Dimensions (unless stated otherwise, dimensions are in millimetres)									Physical Mass (in grams)
		l_Q	D_{G2}	D	h	d_F	b_{T1}	b_{T2}	D_d	Swept Radius	
GRBRK-125	80	40	M12 × 1,75	125	155	–	37	33	8	–	690
GRBRJ-125	80	40	M12 × 1,75	125	155	43	37	33	8	105,5	765
GRBFJ-125	80	25	M12 × 1,75	125	155	43	37	33	8	105,5	775

Technical information and dimensions provided above are subject to tolerances