



Industrial Grade Castors

Steel Framed Castors with Rubber Wheels and Precision Ball Bearings

Fixed castors and swivel castors with steel frames.

Maximum load capacity tested according to BS EN 12532:1999 requirements.

Fixing System	Top plate
Frame	Cold pressed steel plate
Wheel Tread	Natural rubber
Wheel Bearing Type	Double precision ball bearings



Picture may differ from actual product

Features



Double precision ball bearings



Pressed steel frames




Foot actuated wheel brake
(castors with S2 ND suffix, with wheels 75, 100, 130 and 150 millimetres in diameter)




Threadguards to prevent
manifestation of threads and any
other foreign objects
(optional for wheels of 75, 100, 130 and 150 millimetres in diameter)

Technical Information

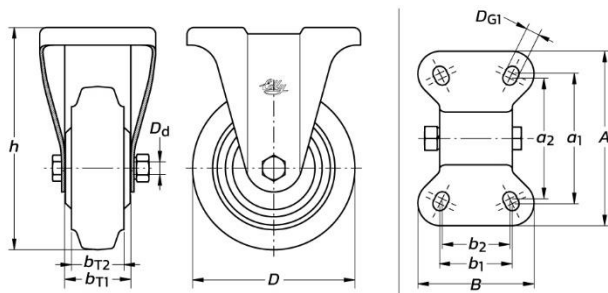

SK Fixed Castors

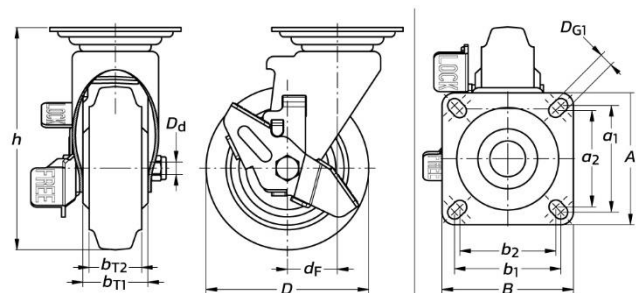

SJ Swivel Castors (applicable to castor frames with or without wheel brake)

Order Code	Load Capacity (kg)	Dimensions (in millimetres)											Physical Mass (in grams)
		A × B	a ₁ × b ₁	a ₂ × b ₂	D _{GI}	D	h	d _F	b _{T1}	b _{T2}	D _d	Swept Radius	
SK-75 ND	89	95 × 72	64,5 × 41,5	61,5 × 38,5	9,5	75	102	-	39	32	10	-	435
SJ-75 ND	89	82 × 82	64,5 × 64,5	61,5 × 61,5	9,5	75	102	30	39	32	10	67,5	580
SJ-75-S2 ND*	89	82 × 82	64,5 × 64,5	61,5 × 61,5	9,5	75	102	30	39	32	10	67,5	630
SK-100 ND	145	115 × 80	82 × 47	78 × 43	11	100	144	-	42	35	12	-	735
SJ-100 ND	145	95 × 95	73 × 73	68 × 68	11	100	144	35	42	35	12	85	1.005
SJ-100-S2 ND*	145	95 × 95	73 × 73	68 × 68	11	100	144	35	42	35	12	87,6	1.095
SK-130 ND	200	139 × 93	104 × 58	96 × 54	11	130	177	-	52	42	12	-	1.230
SJ-130 ND	200	105 × 105	83,5 × 83,5	76,5 × 76,5	11	130	177	40	52	42	12	105	1515
SJ-130-S2 ND*	200	105 × 105	83,5 × 83,5	76,5 × 76,5	11	130	177	40	52	42	12	105	1720
SK-150 ND	220	139 × 93	104 × 58	96 × 54	11	150	198	-	52	42	12	-	1625
SJ-150 ND	220	120 × 120	93,5 × 93,5	86,5 × 86,5	11	150	198	45	52	42	12	120	2.070
SJ-150-S2 ND*	220	120 × 120	93,5 × 93,5	86,5 × 86,5	11	150	198	45	52	42	12	120	2.280
SK-200 ND	275	151 × 102	116 × 67	108 × 59	11,5	200	250	-	55	45	16	-	2.960
SJ-200 ND	275	140 × 140	115 × 115	105 × 105	11,5	200	250	58	55	45	16	158	3.630

Technical information and dimensions provided above are subject to tolerances

* Swivel castors equipped with wheel brake